



Door & Millwork Products

Supplying Premium Quality Products Since 1977

[www. Nelsoninternational.com](http://www.Nelsoninternational.com)

WOOD DOORS
Hemlock Shaker Doors



HS11
One Pane
Shaker
HEM 1 PANEL



HS22
Two Panel
Shaker
HEM 2 PANEL



HS33
Three Panel
Shaker
HEM 3 PANEL



HS55
Five Panel
Shaker
HEM 5 PANEL



H44
Raised
Four Panel
RAISED 4 PANEL



H66
Raised
Six Panel
RAISED 6 PANEL



HEM1
Hemlock
O&B Rim
HEM O&B RIM

All sizes in stock

1'6 X 6'8 X 1-3/8"
2'0 X 6'8 X 1-3/8"
2'4 X 6'8 X 1-3/8"
2'6 X 6'8 X 1-3/8"
2'8 X 6'8 X 1-3/8"
2'10 X 6'8 X 1-3/8"
3'0 X 6'8 X 1-3/8"

BIFOLDS

2'0 X 6'7 X 1-3/8"
2'6 X 6'7 X 1-3/8"
3'0 X 6'7 X 1-3/8"



EXTERIOR DOORS



X8002

Hemlock 1-Lite
W/LOWE Glass

X36


Hemlock
Craftsman 6-Lite

X23

Hemlock
Shaker 3-Lite

X26

Alder
Craftsman

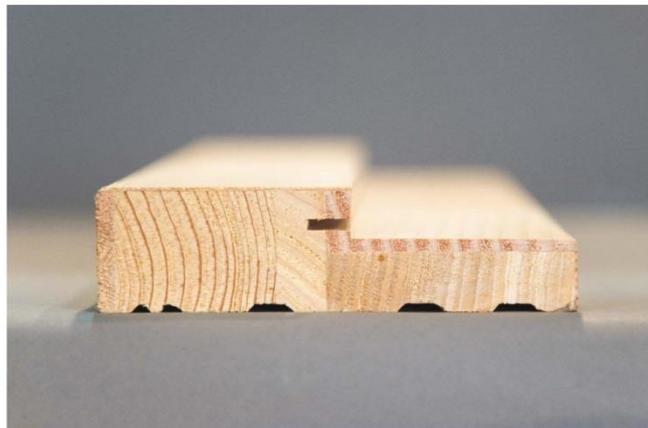

SR Jamb

Hemlock with Kerf

WOOD DOORS
Primed Shaker Doors



1 Panel



2 Panel



3 Panel



5 Panel




Primed
Interior Jamb



Primed
Exterior Jamb

EXTERIOR DOORS

NEW!

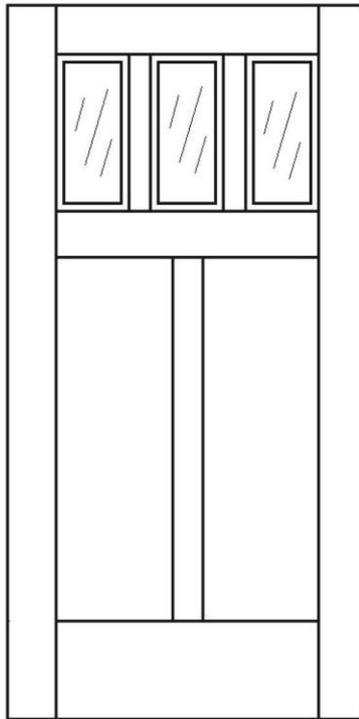


X23

X23: 3 bevelled ig lites,
2 flat panels and sidelite (XSDLT-02)

Door: 36" x 80" x 1 3/4
Sidelite: 14" x 80" x 1 3/4




XSDLT-02

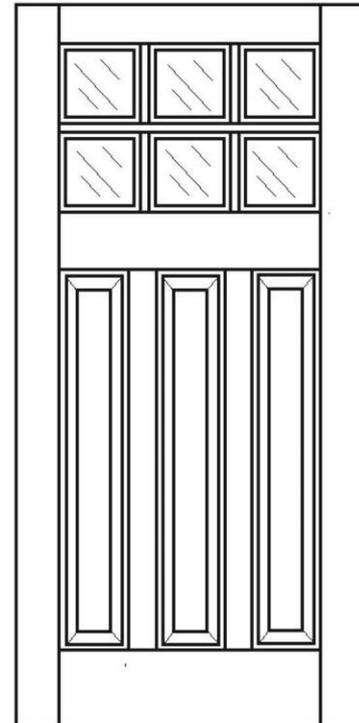

X36

X36: Craftsman Style, 6 bevelled ig lites,
3 raised panels and sidelite (XSDLT-03)

Door: 36" x 80" x 1 3/4
Sidelite: 14" x 80" x 1 3/4

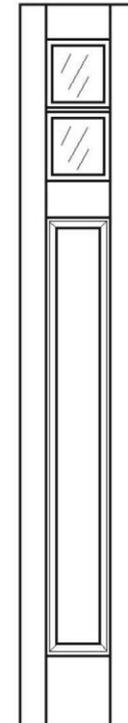

XSDLT-03



Wood Door Handling, Preparation and Finishing Instructions.

HANDLING

Handle all doors with clean gloves and equipment. Avoid dragging one door across another. Handling damage is not considered a factory defect.

Store all doors flat on a level surface at least 6" from the ground. Store only in a well-ventilated area. Keep doors covered, clean and out of direct sunlight.

If doors are to be stored unfinished on the job site, the stile and rail edges must be sealed with an approved base sealant to prevent undue absorption of moisture.

Avoid sudden or extreme humidity and temperature changes.

Doors must be allowed to acclimate to the average humidity of the job site for a period of no less than 48 hours prior to hanging.

PREPARATION

Sand the entire door thoroughly with 5/0 (220 grit) sand paper. Always sand in the same direction as the grain. Spot sanding can cause the finish to appear splotchy.

Note: Small amounts of grease or oil can be wiped clean with a modest application of mineral spirits.

Clean the entire door with a tack cloth being careful to remove all the dust and sand grit. Avoid using caustic or abrasive cleaners as these may react unfavourably with certain finishes.

The doors should be laid flat to allow for the best performance of the finish chosen.

FINISHING

Note: Choosing finishing products from the same manufacturer will ensure compatibility. We recommend using only high quality finishes that carry the "Master Painters Institute" or an "MPI" label. Follow the manufacturers finishing instructions carefully.

Prior to staining, apply a thin coat of sanding sealer or pre-stain to all 6 faces to promote uniform appearance.

We only recommend a clear finish for lighter colored woods. Due to the natural characteristics of Hemlock, dark finishes may appear blotchy or uneven. If more color is desired we would suggest spraying clear lacquer with a 5% mixture of desired tint. Use only light to medium tones as dark colors will appear solid or paint-like and can obscure the natural grain of the wood. The purpose of toning versus staining is to enhance the grain of the substrate while masking minor imperfections in the fibre of the door itself.

DO NOT use an exterior grade stain. It will result in a very uneven finish.

DO NOT use an airless sprayer.

For a final coat, use 2-3 applications of clear topcoat (varnish, polyurethane, lacquer, etc.), sanding lightly between coats, for optimum results.

PRIMED JAMB

Our Pine jamb cut with dado features a premium primed finish with a gesso skim coat and spray finish. Exterior glue is used. (OTHER FINISHES AVAILABLE UPON REQUEST)

SINGLE RAB INTERIOR JAMB

1-1/4" X 4-9/16" X 1-7/16" X 81-7/8"

1-1/4" X 6-9/16" X 1-7/16" X 81-7/8"

DOUBLE RAB INTERIOR JAMB

1-1/4" X 4-9/16" X 1-7/16" X 81-5/8"

1-1/4" X 6-9/16" X 1-7/16" X 81-5/8"

EXTERIOR KERF JAMB

1-1/4" X 4-9/16" X 2-1/8" X 84"

1-1/4" X 6-9/16" X 2-1/8" X 84"

STAIN GRADE HEMLOCK VENEER JAMB

This premium veneered jamb cut with dado features solid hemlock edge strips (1/4") on a Pine core with veneer backing. The veneer thickness is no less than .6mm on the finished product. Exterior glue is used.

FLAT JAMB

21/32" X 4-9/16" X 84"

21/32" X 6-9/16" X 84"

SINGLE RAB INTERIOR JAMB

1-1/4" X 4-9/16" X 1-7/16" X 81-7/8"

1-1/4" X 6-9/16" X 1-7/16" X 81-7/8"

DOUBLE RAB INTERIOR JAMB (with inset stop)

1-1/4" X 4-9/16" X 1-7/16" X 81-5/8"

1-1/4" X 6-9/16" X 1-7/16" X 81-5/8"



#101 - 197 Forester St
North Vancouver BC V7H 0A6

[www. Nelsoninternational.com](http://www.Nelsoninternational.com)